


Product Summary

V_{DS} (V)	$R_{DS(on),max}$ (mΩ)	I_D (A)
20	18 @ $V_{GS} = 4.5V$	7

View and Internal Schematic Diagram

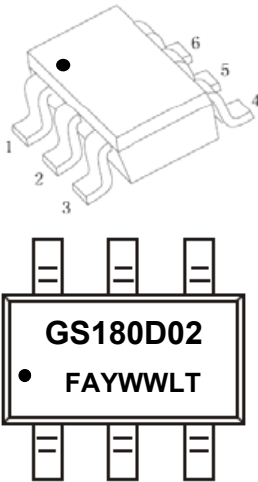

SOT23-6L

NOTE:
 LOGO - GS
 280D02- Part number code
 F - Fab location code
 A - Assembly location code
 Y - Year code
 WW - Week code
 L&T - Assembly lot code


Features

- High power and current handling capability
- Lead free product is acquired
- Surface mount package

Application

- Uni-directional load switch
- Bi-directional load switch

Equivalent circuit

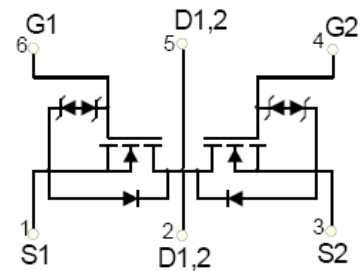

Absolute maximum rating@25°C

Parameter	Symbol	Limit	Unit
Drain-source voltage	V_{DS}	20	V
Gate-source voltage	V_{GS}	±10	
Continuous drain current ($V_{GS}=4.5V$) $T_A=25^\circ C$	I_D	7	A
Pulsed drain current ^(d)	$I_{D,pulse}$	28	A
Power dissipation $T_A=25^\circ C$	P_D	2	W
Operating junction and storage temperature range	T_J, T_{stg}	-55 to 150	°C

Thermal Characteristic

Parameter	Symbol	Typ.	Max.	Unit
Thermal Resistance, Junction-to-Ambient ^(C)	$R_{\theta JA}$	62.5		°C/W

Electrical Characteristics (T_J=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
STATIC PARAMETERS						
Drain-source breakdown voltage	V _{(BR) DSS}	V _{GS} = 0V, I _D =250μA	20			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =16V,V _{GS} = 0V			1	μA
Gate-body leakage current	I _{GSS}	V _{GS} =±10V, V _{DS} = 0V			±5	μA
Gate threshold voltage (note 1)	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.4	0.7	1.0	V
Drain-source on-resistance (note 1)	R _{DS(on)}	V _{GS} =4.5V, I _D =5A		14	18	mΩ
		V _{GS} =2.5V, I _D =3A		17	22	mΩ
Forward tranconductance (note 1)	g _{FS}	V _{DS} =5V, I _D =7A	9			S
Diode forward voltage(note 1)	V _{SD}	I _S =1A, V _{GS} = 0V			1	V
DYNAMIC PARAMETERS (note 2)						
Input Capacitance	C _{iss}	V _{DS} =10V,V _{GS} =0V,f =1MHz		550		pF
Output Capacitance	C _{oss}			103		pF
Reverse Transfer Capacitance	C _{rss}			90		pF
Total gate charge	Q _g	V _{DS} =10V,V _{GS} =4.5V,I _D =6A		7.8		nC
Gate-source charge	Q _{gs}			2.3		nC
Gate-drain charge	Q _{gd}			3		nC
SWITCHING PARAMETERS(note 2)						
Turn-on delay time	t _{d(on)}	V _{GS} =5V,V _{DD} =10V, R _L =1.5Ω,R _{GEN} =3Ω		0.6		ns
Turn-on rise time	t _r			1		ns
Turn-off delay time	t _{d(off)}			13		ns
Turn-off fall time	t _f			4.5		ns

Notes :







1. Pulse Test : Pulse width $\leq 300\mu s$, duty cycle $\leq 0.5\%$.
2. Guaranteed by design, not subject to production testing.




gostone

GMT180D02H4

Typical Performance Characteristics

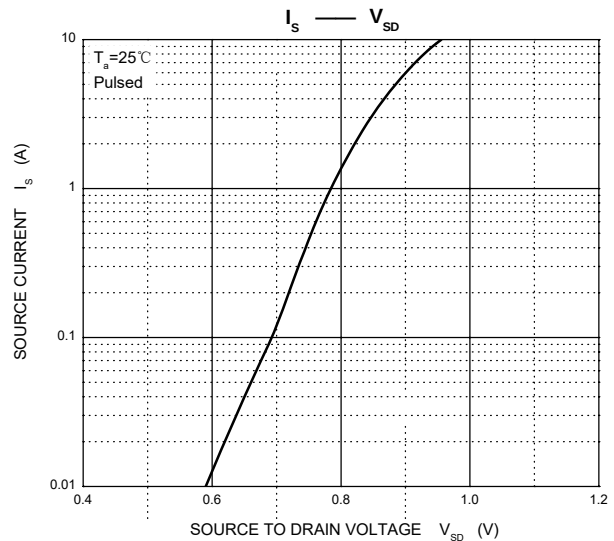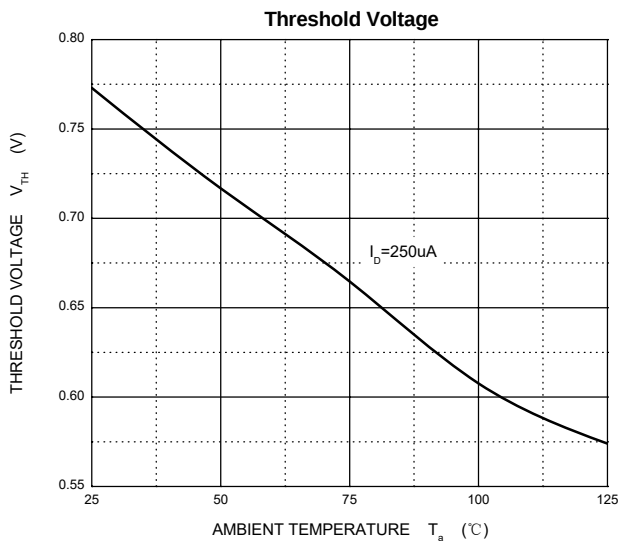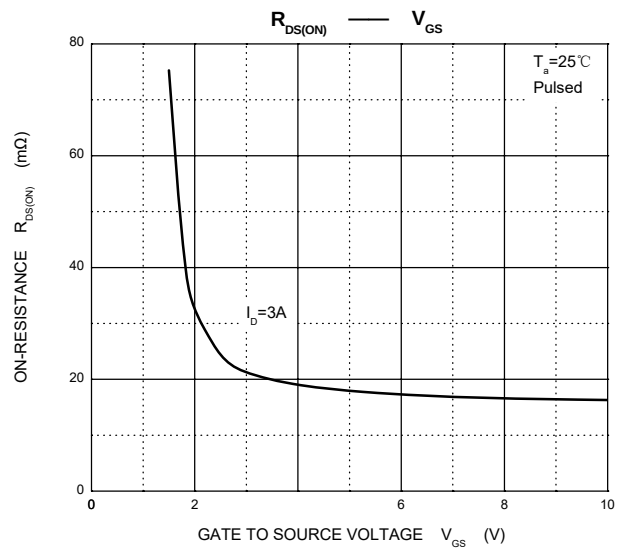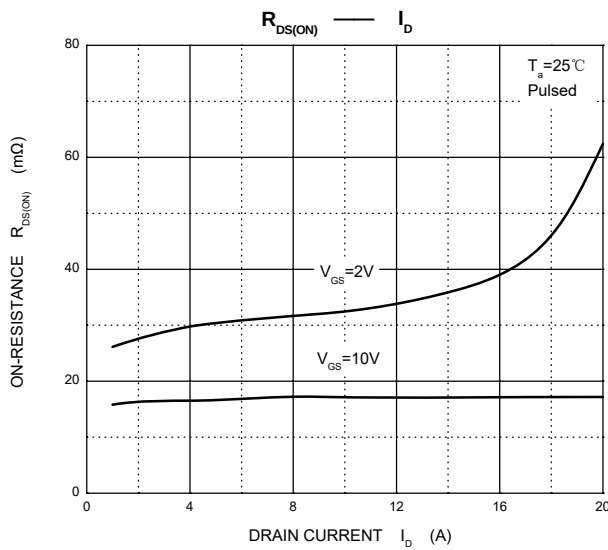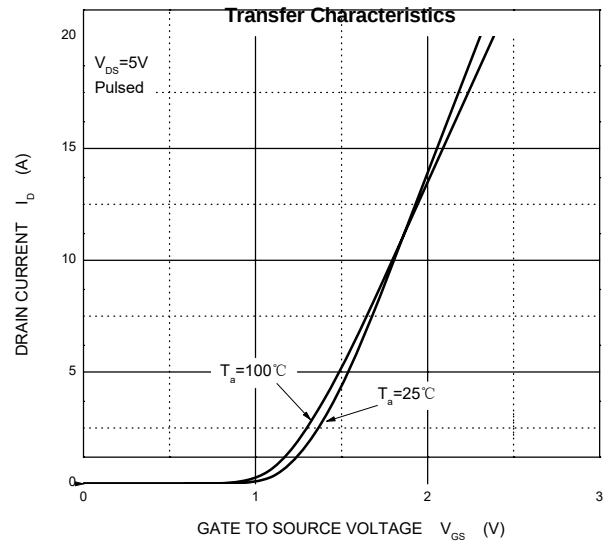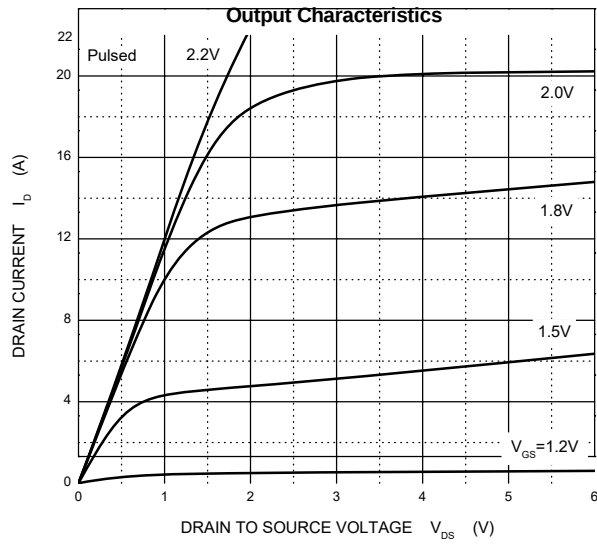

Outline Drawing SOT23-6L

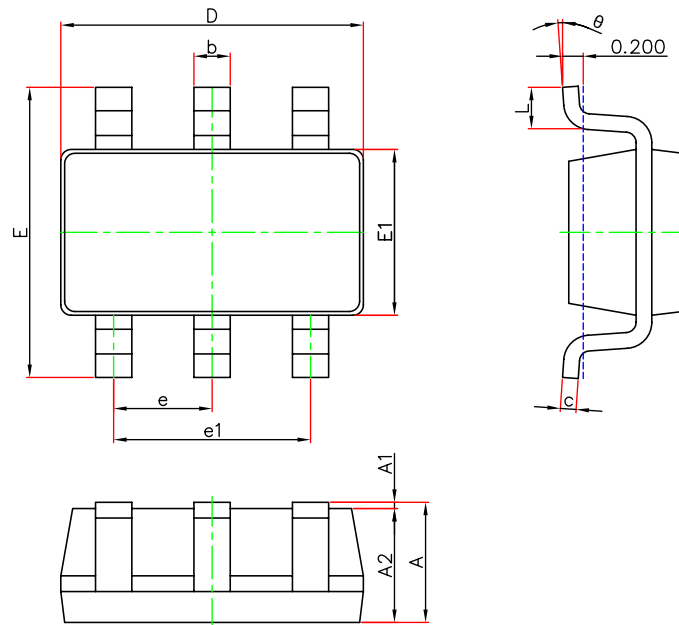

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

Important Notice

The information given in this document shall be for illustrative purposes only and shall in no event be regarded as a guarantee of conditions or characteristics. Gostone reserves the right to change any information herein. With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Gostone or its affiliates hereby make no representation or warranty of any kind, expressed or implied, as to any information provided hereunder, including without limitation as to the accuracy, completeness or non-infringement of intellectual property rights of any third party, and they assume no liability for the consequences of use of such information. In addition, any information given in this document is subject to customer's compliance with its obligations stated herein and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Gostone in customer's applications. The information contained herein is exclusively intended for technically trained staff. No license is granted by implication under any patent right, copyright, mask work right, or other intellectual property right. It is customer's sole responsibility to evaluate the suitability of the product for the intended application and the completeness of the product information given herein with respect to such application. In no event shall Gostone or its affiliates be liable to any party for any direct, indirect, special, punitive, incidental or consequential damages of any nature whatsoever, including but not limited to loss of profits and loss of goodwill, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. In addition, any recipient of this document and the relevant products samples may not alter, decompile, disassemble, reverse engineer, or otherwise modify any information/samples received hereunder. Any intellectual property rights arising from the reverse engineering of Gostone's products shall belong to Gostone.